




CARDAN JOINTS

R.C.D. s.r.l.

Via Parini, 9
40069 Zola Predosa
Bologna - Italia
Tel. (+39) 0516186111
Fax (+39) 0516186188
E-Mail: rcd@rcd.it

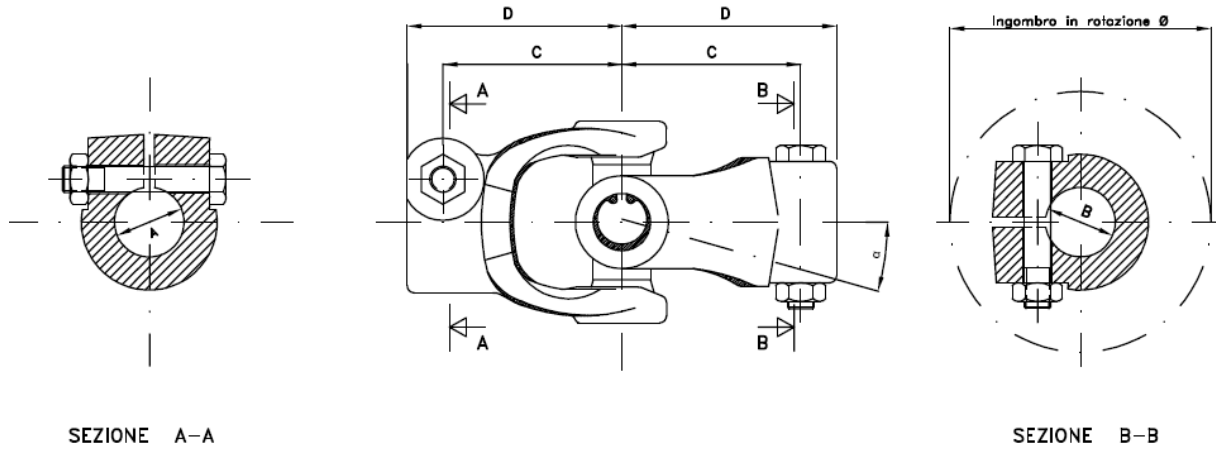

CODE rcd [®]	Technical features					
	Coupling "A"	Coupling "B"	Distance from "C" center	Half-lengths "D"	max overall (Ø)	α
524798	32/64x21	32/64x21	28/28	39/39	55	15°
524806	d19 z48	Ø19H9 to weld	32/32	40/40		15°
524852	1x79	1x79	50/50	60/60	62	15°
524853	1x79	1x54	50/50	60/60	62	15°
525774	1x54	21x24 DIN 5481	37/37	45/45	62	15°
528240	1x79	d19x14	52/52	60/60	62	15°
525945	1x54	Ø33 h11 male to weld	32	40/40	52	15°
528172	1x79	maschio d19x14	48	58	62	15°
525267	1x79	Ø 22 h11 male to weld	50	60/84	62	15°
524820	1x54	1x54	50/50	60/60	55	15°
525823	1x54	1x54	31/31	39/39	56	15°
528266	1x79	1x79 dado non int.	68/68	78/78	62	5°
524796	1x79	0.75"x48	50/50	60/60	70	15°

NOTES:

Available joints with a recovery until 2,5 mm axial accuracy, with bolt in "B" not interfering.
Customized joints by following a drawing, quotation available on request.
Prototypes, spare parts or small series realization.