


NRD-14RLW • NRD-16RLW
NRD-19RLW • NRD-22RLW

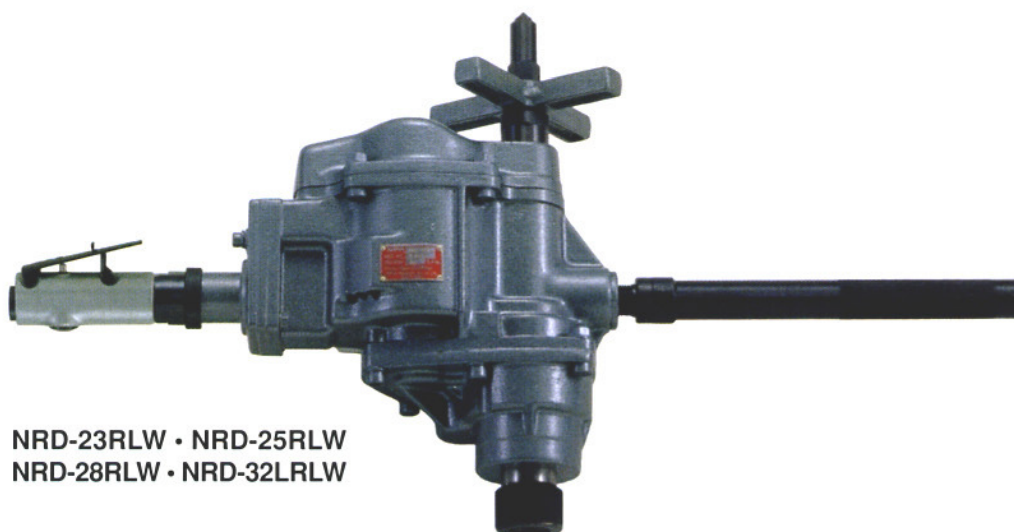

NRD-23RLW • NRD-25RLW
NRD-28RLW • NRD-32LRLW

Modello	Capacità foratura	Cono morse	Velocità a vuoto	Lunghezza	Peso	Ingombro (dal centro all'esterno)	Avanzamento	Potenza	Attacco tubo aria	Ø int. tubo aria	Consumo aria	
	mm.	N.	r.p.m.	mm.	Kg.	mm.	mm.	Kw	RC o NPT	mm.	m ³ /min.	ft ³ /min.
NRD-14RLW	14	1	1.100	417	5.3	39	60	0.96	3/8	12.7	1.1	38.8
NRD-16RLW	16	2	900	433	5.5	39	60	0.96	3/8	12.7	1.1	38.8
NRD-19RLW	19	2	750	433	5.5	39	60	0.96	3/8	12.7	1.1	38.8
NRD-22RLW	22	2	600	433	5.5	39	60	0.96	3/8	12.7	1.1	38.8
NRD-23RLW	23	2	700	296	10.2	41	100	1.47	1/2	12.7	1.4	49.4
NRD-25RLW	25	3	570	296	10.2	41	100	1.47	1/2	12.7	1.4	49.4
NRD-28RLW	28	3	450	296	10.2	41	100	1.47	1/2	12.7	1.4	49.4
NRD-32LRLW	32	3	380	296	10.2	41	100	1.47	1/2	12.7	1.4	49.4

Pressione raccomandata dell'aria 6.0 Kg/cm²