




MARTELLI SCALPELLATORI

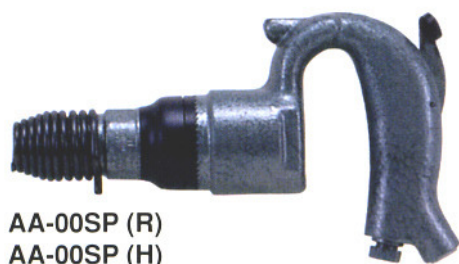


AA-00SP (R)
AA-00SP (H)

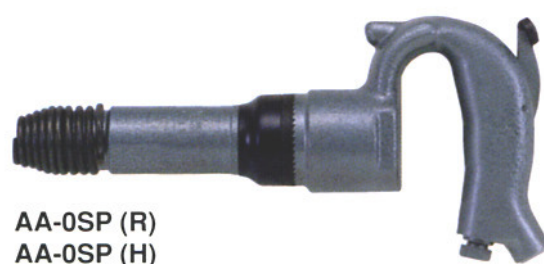


AA-0SP (R)
AA-0SP (H)

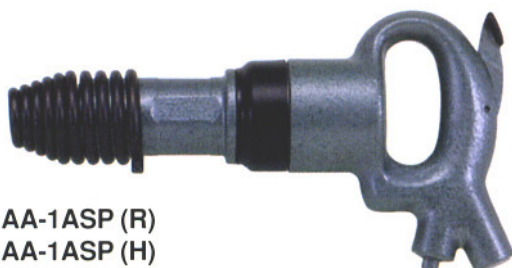


AA-1ASP (R)
AA-1ASP (H)

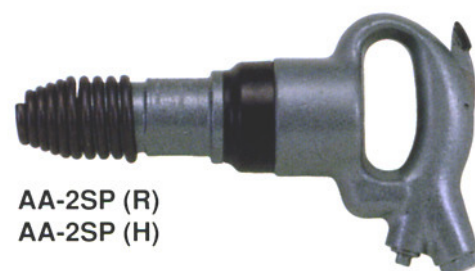

AA-2SP (R)
AA-2SP (H)

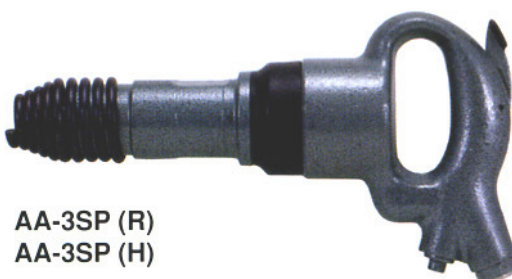

AA-3SP (R)
AA-3SP (H)

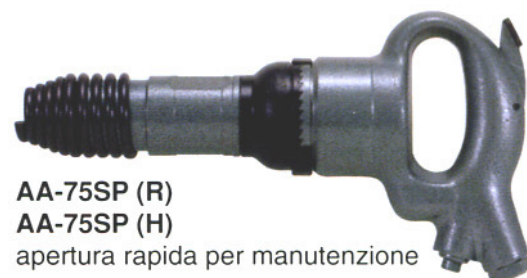

AA-75SP (R)
AA-75SP (H)
apertura rapida per manutenzione



AA-15XSP (R)
AA-15XSP (H)
modelli a bassa vibrazione

Modello		Colpi al minuto	Ø Pistone	Corsa Pistone	Lunghezza	Peso	Attacco tubo aria	Ø int. tubo aria	Consumo aria	
tondo	esagonale	min. ⁻¹	mm.	mm.	mm.	Kg.	RC o NPT	mm.	m ³ /min.	ft ³ /min.
AA-00SP (R)	AA-00SP (H)	3800	18	45	225	2.1	1/4	9.5	0.3	10.6
AA-0SP (R)	AA-0SP (H)	3200	18	75	273	2.4	1/4	9.5	0.35	12.4
AA-1ASP (R)	AA-1ASP (H)	2800	24	51	297	4.2	3/8	12.7	0.4	14.1
AA-2SP (R)	AA-2SP (H)	2400	28	51	312	5.9	3/8	12.7	0.5	17.7
AA-3SP (R)	AA-3SP (H)	2000	28	76	336	6.2	3/8	12.7	0.5	17.7
AA75SP (R)	AA75SP (H)	2000	28	76	336	6.2	3/8	12.7	0.5	17.7
AA-15XSP (R)	AA-15XSP (H)	2000	24	70	338	4.9	3/8	12.7	0.5	17.7

Pressione raccomandata dell'aria 6.0 Kg/cm²